



The INGRESS'R 6" X 36" Tall Switch

Touch Activated Automatic Door Control

The INGRESS'R (136-5 CLEAR) has a contoured profile, combined with a 2" center actuating column running the full 36" height of the switch, allowing activation from any approach and height level.

FEATURES:

- Weather resistant design allows interior or exterior application without adaptation
- UL® 15 amp. micro switch
- Crafted in clear anodized aluminum - will quote other material/finishes
- Available without handicap legend (136-1 CLEAR) - will quote other legends
- Simple, flexible mounting access that easily conceals single and double gang flush electric boxes to make new and retrofit installations uncomplicated
- Black ABS cap attached with security screws (supplied) for wireless transmission
- Adaptable for 1/2" conduit in surface wiring applications
- Fits perfectly onto a 6" x 6" x 42" commercial height bollard where wall mounting is not practical
- Recommended mounting height is 3" from finished floor




A pillar of improved accessibility for automatic doors



Free up parcel laden traffic with a mere bump!




Tapered contour discourages shear-off from wheeled conveyances.

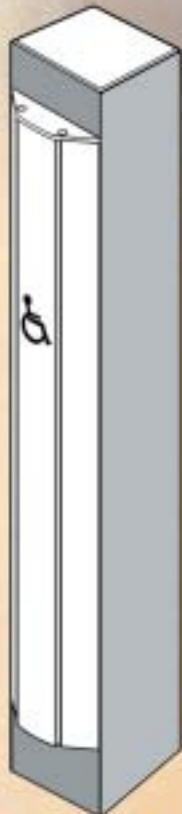

BOLLARD MOUNTED

36" x 6" x 1/2"
(914 x 152 x 38 mm)
fits on 42" x 6" x 6"
commercial height bollard

CONNECTION OPTIONS

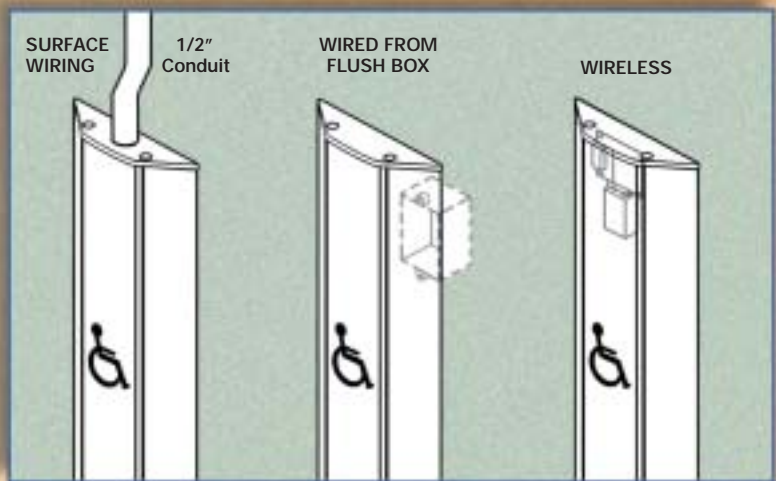

Simple and Flexible Mounting Access

U.S. Patent No. D500,658 S